

## Product Description

Polyolefin foam, closed-cell, flame retardant

## Product Properties

- Very good hydrolysis resistance
- Very good chemical resistance
- Can be equipped with self-adhesive
- Very good fire protection (EN 13501-E, UL94 indicative)

## Applications

- Machine encapsulation
- Thermal insulation
- Electrical products

## Form of Delivery

- Plates
- Cut-outs
- Stamped parts (dimensions on request)
- Can be provided self adhesive

## Processing

Only apply on dry, grease-free, clean surfaces. Press surface well. You can easily adapt the material and cut it with a sharp knife.

## Technical Data

Property	Standard	Value
Color	–	grey
Bulk density	EN ISO 845	28 ± 3 kg/m³
Compression hardness	EN ISO 3386-1	50 ± 15 kPa (25%) 83 ± 27 kPa (40%) 120 ± 40 kPa (50%)
Compression Set	EN ISO 1856-C	≤ 18 % (25%/23°C/22h,0,5h)
Temperature range	–	-30 bis +100°C
Shrinkage	-	max. 5% (100°C)
Fire behavior	ISO 3795 / FMVSS302 EN 13501-1 / DIN 4102-1 UL 94	< 100 mm/min Klasse E / B2* HF1 **
Thermal conductivity	ISO 8301	0,036 W/m K (10°C) 0,040 W/m K (40°C)
Dimensional tolerance	DIN 7715-5	P3
* Internally tested in accordance with		
** internally tested, indicative, not listed and monitored according to UL94.		


## Special Instructions

Materials with foam structure tend to undergo dimensional changes during processing (punching, cutting, pressing, winding, installation, etc.). In general, the dimensional tolerances of DIN 7715-P3 can be met. For special requirements regarding dimensional accuracy, please contact our customer service.

The technical data is based on manufacturer information and internal tests. Availability is subject to technical examination and feasibility for the desired dimensions.

## Cleaning

No significant contamination from the material is expected. Adhesive residue on self-adhesive parts can be removed with gas-oline if necessary. Safety regulations for the cleaning agent used must be observed.

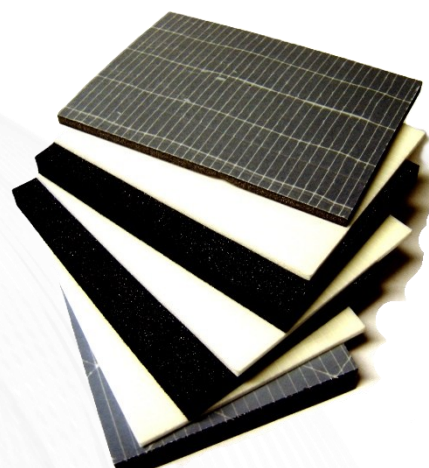

## Environment, Disposal and Safety

Based on existing data and experience, the product is not classified as a hazardous substance under the Hazardous Substances Regulation and corresponding EC directives. However, we recommend observing the usual care and hygiene practices for handling chemical substances. Residues can be disposed of with household waste. Local regulations must be observed.

The product complies with the following directives, or meets the required application restrictions: 1907/2006 (REACH), 2011/65 (RoHS2), 2015/863 (RoHS3), 2019/1021 (POP), 517/2014 (Greenhouse Gases), 2024/590 (Ozone Layer Depletion).

## Limitation of liability

Our general terms and conditions of sale with warranty conditions, which you can refer to at [www.hanno.com](http://www.hanno.com), apply. This datasheet provides non-binding information without guarantee. The stipulated instructions for use are to be adapted to the respective conditions. The user is obligated to check the suitability and applicability through their own testing in order to avoid failures for which we assume no liability. Subject to technical changes. In case of discrepancies, the German version shall prevail.

You can request the latest version of this datasheet at [info@hanno.com](mailto:info@hanno.com).

## Hanno Werk GmbH & Co. KG

Hanno-Ring 3-5

30880 Laatzen

Germany

Telephone: +49 5102 7000-0

[info@hanno.com](mailto:info@hanno.com)

[www.hanno.com](http://www.hanno.com)

