


Product Description

Closed cell polyether-based sealing foam.

Product Properties

- Low emissions
- hydrolysis-resistant
- halogen-free
- self-extinguishing

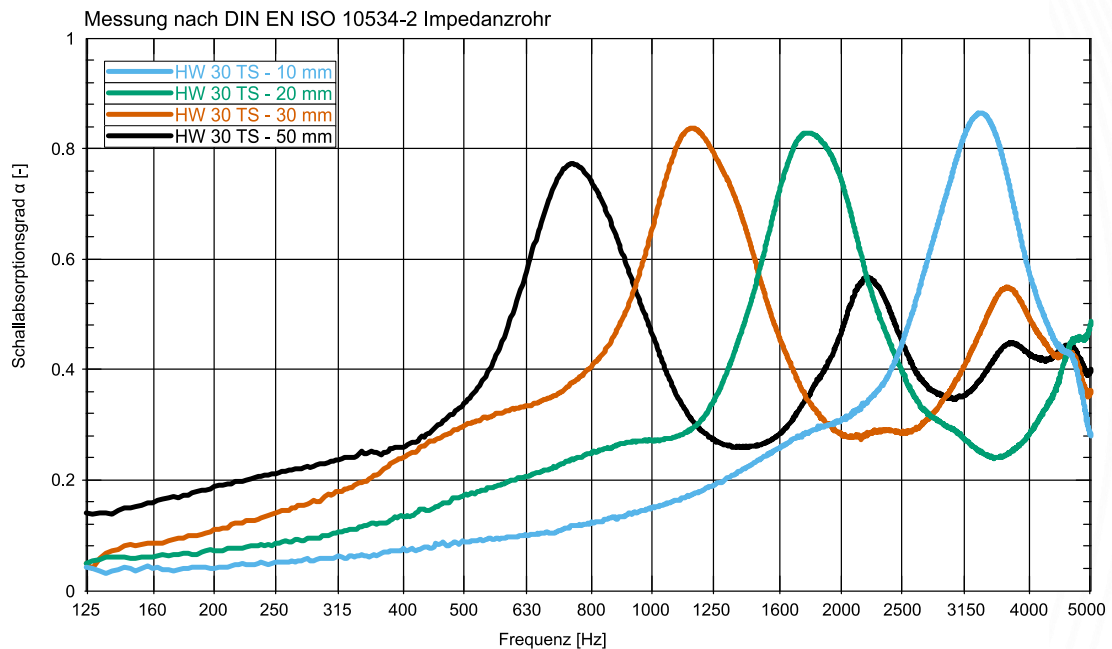

Applications

- Ventilation systems
- Door panels
- Light fixtures
- Automotive
- Condensing boilers

Form of Delivery

- Blocks
- Plates
- Cut-outs
- Stamped parts (dimensions on request)
- Rolls
- Can be provided self adhesive

Processing

Only apply on dry, grease-free, clean surfaces. Press surface well. Hanno®-HW 30 TS is easily punchable and cuttable. You can easily adapt the material and cut it with a sharp knife.

Technical Data

Property	Standard	Value
Color	-	anthracite
Bulk density	EN ISO 845	ca. 33kg/m ³
Compression hardness	EN ISO 3386	ca. 5 kPa (40 %)
Tensile strength	EN ISO 1798	> 70 kPa
Elongation at break	EN ISO 1798	> 90%
Compression set	EN ISO 1856	< 9% (50%)
Air permeability	EN ISO 9237	≤ 10 l/m ² s (50Pa)
Emissions	VDA 278	VOC << 200 ppm * FOG << 600 ppm *
Fire behavior	FMVSS 302 / DIN 75200 / ISO 3795	< 100 mm/min
* in accordance, informative		

Special Instructions

Materials with soft foam structure tend to undergo dimensional changes during processing (punching, cutting, pressing, winding, installation, etc.). In general, the dimensional tolerances of DIN 7715-P3 can be met. For special requirements regarding dimensional accuracy, please contact our customer service.

Cleaning

No significant contamination from the material is expected. Adhesive residue on self-adhesive parts can be removed with gasoline if necessary. Safety regulations for the cleaning agent used must be observed.

Environment, Disposal and Safety

Based on existing data and experience, the product is not classified as a hazardous substance under the Hazardous Substances Regulation and corresponding EC directives. However, we recommend observing the usual care and hygiene practices for handling chemical substances. Residues can be disposed of with household waste. Local regulations must be observed.

The product complies with the following directives, or meets the required application restrictions: 1907/2006 (REACH), 2011/65 (RoHS2), 2015/863 (RoHS3), 2019/1021 (POP), 517/2014 (Greenhouse Gases), 2024/590 (Ozone Layer Depletion).

Limitation of liability

Our general terms and conditions of sale with warranty conditions, which you can refer to at www.hanno.com, apply. This datasheet provides non-binding information without guarantee. The stipulated instructions for use are to be adapted to the respective conditions. The user is obligated to check the suitability and applicability through their own testing in order to avoid failures for which we assume no liability. Subject to technical changes. In case of discrepancies, the German version shall prevail.

You can request the latest version of this datasheet at info@hanno.com.

Hanno Werk GmbH & Co. KG

Hanno-Ring 3-5

30880 Laatzen

Germany

Telephone: +49 5102 7000-0

info@hanno.com

www.hanno.com

